

XL SLIDE AXLE



XL 70 Slide Axle (Slider)

YOUR SOLUTIONS-BASED HAULING PARTNER



XL 70 SA

SUPERIOR HYDRAULICS

The XL Slider, a lowboy trailer, features an **extended dump angle of 17 degrees**, and improved hydraulics to keep your equipment from unnecessary wear. Hydraulic sliding axle assembly with traveling bumper provides under ride protection.



XL 110 SA

UNMATCHED EFFICIENCY

A **6½ degree load angle** permits you to easily load pavers and rollers, while the winch at the front loads inoperable equipment. A single 2 stage cylinder provides **maximum travel and minimal maintenance**.



XL 70 SSA

SUPER SLIDER OPTION

Using the innovative technology custom engineered by XL for this product, the Super Slider takes hydraulics to a new standard with the **elimination of a center cylinder**, therefore keeping repair costs down.


BUILT WITH YOU IN MIND

- 17 degree dump angle
- Drop leg landing gear
- Automatic slack adjusters
- 12,000 lb winch with 100' of 7/16" cable, 20,000 and 30,000 lb winch option available for even larger equipment
- 21" King Pin setting
- 25,000 lb 5/8" wall axles
- 2 Recessed cable rollers
- 10' 5" full-width upper deck
- All XL Specialized Trailers' products go through the new, premium paint process. XL paint includes a **full 1 year warranty**.
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a **5 year structural warranty**.

FIND YOUR SPECIALIZED SOLUTION TODAY

visit xlspecializedtrailer.com

XL SLIDE AXLE

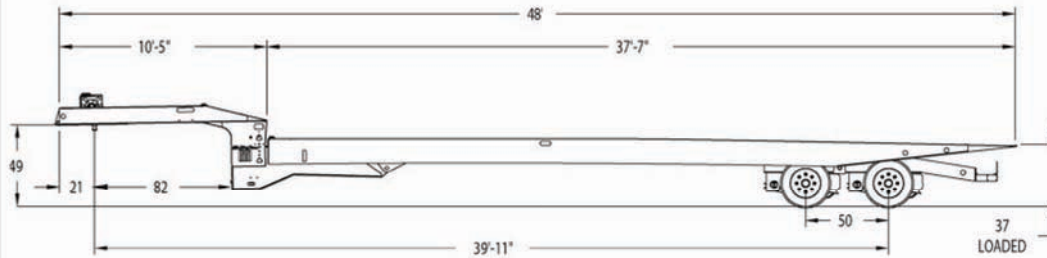

XL 70 SA
 CAPACITY: 70,000 LB OVERALL
 CONCENTRATED: 50,000 LB IN 10'
 OAL: 48' | OAW: 102"

SPECS

GOOSENECK

10' 5" LONG
 12,000 LB HYDRAULIC WINCH
 WITH MANUAL KICK OUT
 100' CABLE, CABLE ROLLER BACK OF NECK
 DROP LEG JACK
 (2) TOOL BOXES IN UPPER DECK
 CHAIN DROPS ON 48" CENTERS
 1 3/8" APITONG DECKING RAISED
 82" SWING CLEARANCE
 21" KING PIN SETTING
 HYDRAULICS RUN OFF OF WET KIT
 PIVOTING 5TH WHEEL PLATE

SUSPENSION

25,000 LB AIR RIDE
 MANUAL DUMP VALVE

WHEELS AND TIRES

6.75 X 17.5 STEEL RIMS
 245 / 70R / 17.5 TIRES

MAIN DECK

102" WIDE
 37' 6" LONG
 T-I FLANGE, 80K WEB
 CABLE ROLLER ON FRONT DECK
 37" LOADED DECK HEIGHT
 CHAIN DROPS ON 24" CENTERS
 1 3/8" APITONG DECKING RAISED
 17° DUMP ANGLE ON 48' TRAILER
 15° DUMP ANGLE ON 53' TRAILER
 4" JR. I-BEAM CROSSMEMBERS AND
 3" TUBE ON 16" CENTERS
 FAB I-BEAMS
 6 1/2° LOAD ANGLE

AXLES

(2) 25,000 LB NOMINAL
 50" SPACING
 HUB PILOT, OUTBOARD DRUMS
 251M ABS
 (2) SPRING BRAKES
 12 1/4 X 7 1/2" BRAKES
 LIMIT CHAINS ON AXLES

LIGHTING

D.O.T APPROVED 12V SEALED
 GROTE HARNESS
 RUBBER MOUNTED LED LIGHTS
 (1) MID-TURN SIGNAL PER SIDE
 (2) CLEARANCE LIGHT PER SIDE
 7 POLE ELECTRICAL SOCKET
 2 TAIL LIGHT PACKAGE WITH
 ALUMINUM COVER

NEW INDUSTRY-LEADING PAINT PROCESS


1 YEAR WARRANTY
 BLACK, IH RED, OR NEW CAT YELLOW
 AIR & ELECTRIC DONE AFTER PAINT

AVAILABLE MODELS

XL 70 SA
 XL 110 SA

ALL ALSO AVAILABLE AS SUPER
 SLIDERS, XL SSA

OPTIONS

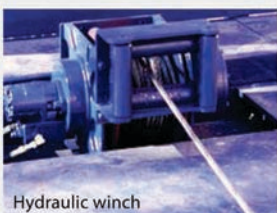

Hydraulic winch



XL Super Slider

POPULAR OPTIONS

XL Super Slide Axle version
 15, 20 or 30,000 lb
 hydraulic winch
 24 HP self contained
 power unit
 2 Speed landing gear

60" Axle spacing
 Auxiliary air outlet at rear
 Hydraulic deck levers
 Wireless remote
 Fork lift package
 Many more available