



PS Transport Equipment

316 W. Milwaukee Street, PO Box 511 New Hampton, Iowa 50659 (800) 222-6047 www.zipstransportequipment.com

XL SPECIALIZED STEP DECK



YOUR SOLUTIONS-BASED HAULING PARTNER



SUPERIOR VERSATILITY

XL Step Decks offer versatility in specialized hauling through its low-profile design. Boasting an **unloaded weight as low as 11,500** lb, the XL Step Deck's lightweight strength puts you at an advantage.



BUILT TO LAST

Featuring 80 K webs and T-1 flanges, the XL SD is designed to withstand years of usage. With I-beam cross members on 18" centers, these trailers are truly built to last, resulting in excellent resale value.



SPECIALTY OPTIONS

If you need a specialized version of the classic step deck, XL is for you. With abundant options, the XL Step Deck is sure to fit your **specialty hauling needs**. The XL team is ready to help you find your solution.

BUILT WITH YOU IN MIND

- 6" channel outside rail
- 2 speed landing gear
- 5/16" x 2" rub rail
- Sealed electrical systems
- 25,000 lb nominal axles
- · Disc wheels pilot mount
- Cambered deck
- 121" spread axle
- 1½" Apitong decking flush
- 102" wide
- Many options and additions are available
- T-1 flanges
- 80 K web
- All XL Specialized Trailers' products go through the new, premium paint process. XL paint includes a full 1 year warranty.
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a 5 year structural warranty.

FIND YOUR SPECIALIZED SOLUTION TODAY

visit xlspecializedtrailer.com






Transport Equipment

316 W. Milwaukee Street, PO Box 511 New Hampton, Iowa 50659 (800) 222-6047 www.zipstransportequipment.com

XL SPECIALIZED STEP DECK

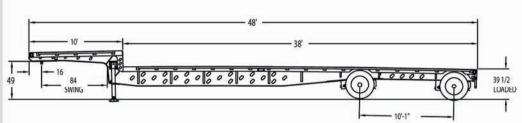

XL 80 SD

CAPACITY: 80,000 LB OVERALL CONCENTRATED: 60,000 LB IN 10' OAL: 48' | OAW: 102"

SPECS

GOOSENECK

10' LONG
2 SPEED LANDING GEAR, HANDLE CURB
SIDE
16" KING PIN SETTING
84" SWING CLEARANCE
5%" X 2" RUB RAIL WITH SINGLE
PIPE SPOOLS
STAKE POCKETS ON 24" CENTERS
49" 5TH WHEEL HEIGHT
1% APITONG DECKING FLUSH

SUSPENSION

25,000 LB AIR RIDE

AXLES

(2) 25,000 LB NOMINAL 10' 1" SPACING HUB PILOT, OUTBOARD DRUMS 4S2M ABS 161/2" X 7" BRAKES

MAIN DECK

38'LONG
T-1 FLANGE, 80K WEB
6" MILL CHANNEL SIDE RAILS
STAKE POCKETS ON 24" CENTERS
39½" LOADED DECK HEIGHT
5%" X 2" RUB RAIL WITH SINGLE PIPE
SPOOLS
4" JR. I-BEAM CROSS MEMBERS ON
14" CENTERS
1½" APITONG DECKING FLUSH
PIPE KNEE BRACES ON 42" CENTERS
COVERED WHEELS
FLAG HOLDERS AT REAR

WHEELS AND TIRES

8.25 X 22.5 STEEL RIMS 255 / 70R / 22.5 TIRES

LIGHTING

D.O.T APPROVED 12V SEALED
GROTE HARNESS
RUBBER MOUNTED LED LIGHTS
(1) MID-TURN SIGNAL PER SIDE
(2) CLEARANCE LIGHT PER SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LIGHT PACKAGE WITH
ALUMINUM COVER

NEW INDUSTRY-LEADING PAINT PROCESS

FULL 1 YEAR WARRANTY BLACK, IH RED, OR NEW CAT YELLOW AIR & ELECTRIC DONE AFTER PAINT

AVAILABLE MODELS

XL 70 SD XL 110 SD XL 80 SD XL 120 SD XL 90 SD XL 130 SD XL 100 SD

OPTIONS





POPULAR OPTIONS

Beaver tail
3rd Axle
Double pipe spools
Closed axle spacing
Spring ride

Dump valve
Manual ride height
36" Flip neck extension
Various widths and lengths
Many more available!